



HONORED TO SERVE THOSE WHO DEFEND. For more than 200 years, Remington has supported those who defend the front lines of freedom more than any other firearms manufacturer. Weapons like the Model 870 pump shotgun, Model 700 precision rifle and M24 precision sniper rifle have served with distinction in conflicts worldwide.

Today, that tradition continues, with the most innovative military firearms available, specifically engineered by and for personnel in every branch who bravely stand in harm's way.

At state-of-the-art R&D and production facilities across the country, the most dependable rifles, carbines, shotguns, and ammunition in the world are built to aerospace standards for precision. And shipped to military units around the globe.

Highly experienced military personnel are directly involved in product development. This ensures that every weapon system is purpose-built for its specific use. From initial concept, to prototype, to final evaluation – every defense product is meticulously engineered and torture-tested. Resulting in the most reliable performance to defend our way of life.



PROUDLY MADE IN THE USA BY AMERICAN WORKERS





As America's Oldest Gunmaker, Remington has supported America's warfighters and law enforcement professionals longer than any other firearms company.

Founded in upstate New York in 1816, Remington made a name for itself making high quality, extremely accurate muzzle-loading smoothbore and rifle barrels that were used in some of the finest American-made arms of the day. By the mid 19th century, Remington's engineers were creating unique designs, and its new manufacturing plant in Ilion, NY was turning out the most rugged and reliable firearms of the day. The degree Remington New Model Army Revolver, and Rolling at L. Block Carbine and its pistol variant served on American's open battlefields, helped tame its wild frontier, and served warfigerabroad with America's allies around the world.

At the outbreak of World War I, Remington was already one of the world's most trusted and capable firearms makers, and supported the Allied nations with quality arms. This included making M1907 rifles under contract for the French government, 1914 Enfield rifles for the British, and even M1891 Mosin Nagants for the

Russian army. When the United States entered the war, Remington was a major manufacturer of the M1917 Enfield rifle that was standard issue for the US military.

With World War II came the need for increased ammunition capacity in the US industrial base. As the country's leading ammunition manufacturer, with their Remington, Union Metallic Cartridge, and Peters brands, the US government called on Remington to design and build a new ammunition manufacturing center at Lake City, Missouri. From 1940 - 1985, Remington operated the Lake City Plant, making sure that America's warfighters had quality ammunition.

During World War II, Remington was a major producer of the Model 1903A3 Springfield rifle. Remington-made '03 rifles distinguished themselves through unmatched quality and precision, earning Remington the unique opportunity to design and build the Model 1903A4 variant – America's first type-classified sniper rifle. The M1903A4 firmly established Remington as America's premier builder of precision military rifles.

In 1950, Remington introduced the legendary Model 870 Pump Shotgun. The Model 870 immediately earned its place among the duty shotguns of the time. Proving superior in reliability and durability, the Model 870 became the most trusted shotgun design in history. To this day, over 60 years after its introduction, the Model 870 is without dispute, the most trusted combat shotgun of all time.

By the latter half of the 20th century, Remington had earned the reputation as the preeminent supplier of precision rifles. When the United States Marine Corp decided to field a dedicated rifle for its elite scout-snipers, they turned to the highly-regarded Remington custom shop 40-X competition rifle as the basis for what would become the M40 Sniper Rifle. First fielded in 1966, during the Vietnam War, the M40 continues to serve the USMC. Now in its M40A6 variant, the M40 still uses the highly accurate Remington 40-X action, and is built using the extremely rugged, but highly adaptable Remington Arms Chassis System (RACS).

In 1986, looking to field its own dedicated sniper rifle, the US Army followed suit. After an open competition, the US Army selected Remington to build the M24 Sniper Weapon System. Built by a dedicated team of Remington craftsmen, the M24 served the US military for more than 20 years. In 2010, facing the new requirements of the Global War on Terrorism, the US Army sought to increase the capabilities of the M24 by upgrading it to the larger resistance. 300 Winchester Magnum cartridge,

improving the chassis system,
modernizing its optics, and signature
reduction capabilities. Through another
open competition, Remington was again
awarded the opportunity to provide
America's warfighters with this newer,
more advanced weapon system; the M2010
Enhanced Sniper Rifle.

Today, Remington continues its history of providing the most advanced service weapons available including shotguns, carbines, and sniper rifles to America and its allies. The Remington R10 returns the overmatch capability of the 7.62x51 cartridge to the warfighter in a platform similar in size and weight to smaller 5.56 platforms. The R12 auto-loading shotgun offers the capability to fire the widest possible range of shotshell ammunition, including reduced-recoil loads, previously only functional in pumpaction platforms, in a light-recoiling, compact platform. The Remington PSR, designated the MK21 by USSOCOM, changed all the rules for what a sniper rifle can be. By combining ultra-long range precision, the ability to tailor the size and caliber of the rifle to suit the mission, and true battlefield serviceability, the MK21 is currently the most advanced, fielded sniper system in the world.

With over 200 years of experience providing the most advanced, most reliable, high performance firearms, Remington continues to support those who serve and to uphold the traditions that defend freedom worldwide.

CARBINES - 5

R10 - 7

R4 - 9

ACR - 11

SNIPER RIFLES - 13

RACS - 15

M2010/M24(MSR) - 17

PSR-19

R700 - 21

SHOTGUNS - 23

R870 PUMP-ACTION - 25

R870 MCS - 27

R12 VERSAMAX - 29

AMMUNITION - 31

PREMIER RIFLE AMMUNITION - 33

GOLDEN SABER BLACK BELT - 35

GOLDEN SABER BONDED - 37

GOLDEN SABER HPJ - 38

HANDGUN BARRIER TEST RESULTS - 39

SHOTGUN SLUGS - 41


TACTICAL BUCKSHOT - 42

BALLISTIC DATA - 43-46

CARBINES

BUILT TO DOMINATE THE MODERN BATTLEFIELD.

From the oldest name in American firearms, comes the world's most advanced lineup of tactical carbines. Combining light weight, agility, adaptability and precision, Remington carbines deliver the tactical advantage needed for the most demanding scenarios. They're engineered to meet the evolving needs of today's operators. With features like modular design, gas piston operating systems and ambidextrous controls. Remington carbines bring combat rifle technology into the 21st century.





RIO



The new standard for lightweight 7.62mm NATO AR performance. Built around the Gen II, our patent-pending carbine design, reengineered from the bolt group out to deliver .308 power with the handling characteristics and similar outside dimensions of 5.56mm ARs. The R10's hammer-forged, sniper-grade barrel features 5R rifling for added precision and a maximum effective range of 800 meters. It's the .308 carbine for unlimited adaptability and maneuverability wherever it's called to serve.



Delivering powerful AR performance in a lightweight 7.62mm NATO platform, the tackdriving R10 features fully ambidextrous controls, hammer-forged sniper-grade barrel with 5R rifling, and modular RAHG handguard, allowing unmatched adaptability without unnecessarily cluttering the weapon's profile.



TROY BUIS

Hardened T6 aircraft aluminum construction. Designed for easy rail mounting, durability and continuous zero hold.



COLLAPSIBLE STOCK

Length of pull: 12.5"-16.5"



LANCER L7 20-ROUND TRANSLUCENT MAGAZINE



16" HAMMER-FORGED BARREL



LOWER RECEIVER

Fully ambidextrous lower receiver controls, including the magazine release, bolt stop, and safety/ selector. Magazine release and bolt stop are integral to receiver, combining solid construction reliability with uncompromising ergonomics.

RAHG HANDGUARD

The modular RAHG handguard delivers unmatched adaptability – accessories can be attached while maintaining an efficient, uncluttered, profile.



R4 RIFLES AND CARBINES



Always on guard. Never outgunned. The M16-type family of rifles and carbines has nearly 60 years of combat-proven reliability and versatility. And Remington® has more than 200 years experience delivering unmatched quality and firearm craftsmanship. With the introduction of the R4 platform and the more than 5,000 different components and accessories for customization, operators have more options than ever before. Whether the mission demands the versatile and reliable R4, the advanced capability, Magpul MBUS® -equipped R4 Operator, or the ultra-adaptable R4 Enhanced, which features an ambidextrous lower and RAHG handguard, Remington carbines deliver performance you can count on, every time.






Free-floated tube design with seven planes for virtually infinite accessory configuration.



ADVANCED LOWER RECEIVER

Features fully ambidextrous fire controls, left and right magazine release buttons, and flared magazine well for effortless magazine insertion.

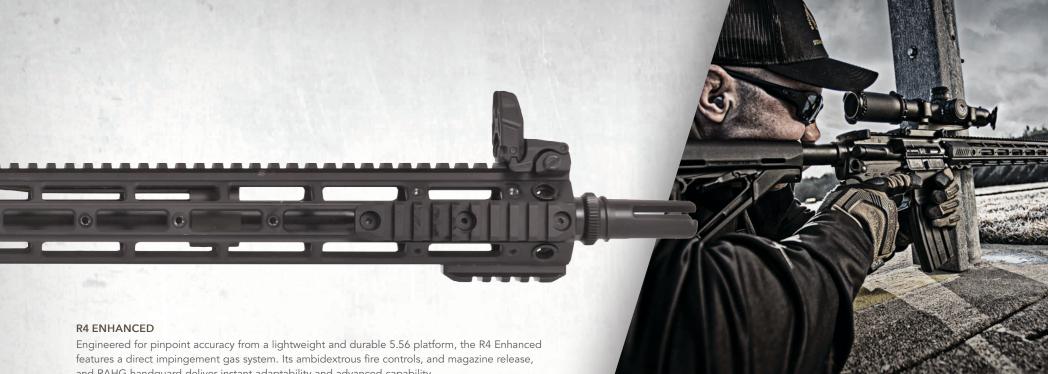

and RAHG handguard deliver instant adaptability and advanced capability.



MULTIPLE MODES

Full-auto, Semi-auto and Burst modes, allowing operators to customize their firepower levels to fit any scenario.

R4 PATROL

It's the AR workhorse of dependability. With a direct impingement gas operating system, chrome-lined barrel, and semi-auto, full-auto and burst fire capability, it's the AR platform tried, trusted and proven to deliver when needed.

R4 OPERATOR

Built on the R4 Patrol's foundation of AR reliability, The R4 Operator adds a Magpul MBUS® furniture upgrade for improved stability, adjustability and shooter fit.



COLD HAMMER-FORGED BARREL

Every Remington barrel is manufactured to meet aerospace standards for precision. Chrome-lined or FNC surface converted 4140 carbon steel barrels, accommodate a wide selection of muzzle breaks and flash hiders.

ACR

BOLT ASSEMBLY

Forward-mounted charging handle can be switched within seconds from left to right side of the upper receiver and is non-reciprocating during firing



SPECIFICATIONS - ACR 14.5" w/ Collapsible Stock

Weight	7 lbs.	
Overall Length Min LOP Max LOP	36.4" 39.2"	
Accuracy	Sub 2 MOA	
Reliability	7,500 MRBEFF	
Durability	All Parts - 2x M4 FAT Requirements	

ENDURANCE TESTING Multiple grueling endurance tests confirmed MIL-STD environmentals, barrel life, accuracy and reliability to at least 2x current U.S. Army standards for the M4 Carbine







One rifle. Many missions. The revolutionary, fully-modular Remington Adaptive Combat Rifle (ACR). The ACR was initially conceived to provide today's warfighter an American-made, reliable, accurate and mission-configurable rifle. Three American companies – Magpul Industries Corp., Bushmaster and Remington – shared this common vision, and after multiple iterations of torturous testing only the strongest materials, components and concepts

survived. The ACR can change barrels, stocks and accessories to go from a close-quarters battle platform to a designated marksman platform. Add a superbly reliable gas piston operating system, controllable full-auto fire capability, a non-reciprocating bolt handle, a monolithic free-floating rail system and intuitive, ambidextrous controls, and you have a platform that is a natural fit for any operator and gives him all the options he needs. Made in the USA for government sales by the oldest name in firearms and ammunition – Remington delivers again.



Adjustable, piston-driven gas system. Bolt carrier is supported by hardened internal bearing rails



RAIL

Free-floating MIL-STD-1913 monolithic rail

BARREL

Lightweight Torque Wrench or Tool-less quick change barrel system. Available in 8.25", 10.5", 14.5" and 16.5"



QD BARREL SYSTEM

Available with a quick-detach barrel system that allows operator-level changes of barrel length and caliber.



Ultra-compact 19.75" length with stock folded allows unmatched concealability while optimizing barrel length at 9" for maximized energy on target out of a small package.





OPTIONAL FOLDING CHARGING HANDLE

The positively latching, forward-folding, ambidextrous, non-reciprocating charging handle reduces the side profile while providing additional clearance for electro optics



LIGHT-WEIGHT BARREL NUT


Redesigned barrel nut provides more rigid mounting for improved accuracy and consistent POI while allowing replacement of a complete barrel assembly with a single torque wrench in minutes.



SNIPERRIFLES

ADVANCED PRECISION FOR THE MODERN BATTLEFIELD.


When lives depend on marksmanship, you can depend on the precision and reliability of Remington bolt-action rifles. With the legendary Model 700 action at the heart of every Remington sniper rifle, the cartridge head is surrounded and supported with three overlapping rings of solid steel — the bolt face, barrel, and receiver. It's the same high-precision action at the core of the advanced M-24 Sniper Weapon System, and the foundation for unparalleled accuracy, stability and results in the field.





REMINGTON ACCESSORY CHASSIS SYSTEM (RACS)

AVAILABLE TO ACCOMMODATE REMINGTON LONG AND SHORT 700 ACTIONS



• Adjustable position recoil pad :

• Adjustable length of pull stock .



REMINGTON ACCESSORY CHASSIS Folding stock SYSTEM, LONG ACTION (RACS-LA)



ultra-lightweight package.





REMINGTON ACCESSORY CHASSIS SYSTEM-LIGHTWEIGHT (RACS-LW)



- Cerakote Gen II IR Signature Management in Pantone 30118
- Bolt-On Package Complete w/ Magazines and Modular Rail Sections.

The patent-pending Remington Accessory Chassis System (RACS) incorporates state-of-the-art operator-defined attributes such as a free-float tubular design and a fully featured front handguard section. Operator-selectable auxiliary rail section pieces in various lengths can be attached to any of the seven remaining facets of the octagonal handguard, which allows the operator to apply clip-on in-line night vision systems in addition to other ancillary systems such as lasers, bipods and other accessories. The folding RACS buttstock provides the operator with a wide variety of adjustments to allow setting the system to suit the shooter and the operating conditions.

.20 MOA monolithic top rail ensures adequate elevation adjustment for ranges beyond 1500m while also permitting the installation of ancillary electro-optics



• Fully adjustable for length of pull, shoulder weld, comb height and cast. • Quick, silent adjustments throughout the full range of travel. • Tool-free adjustment locking levers. • Multiple flush-cup sling swivel receivers. • Removable accessory rail sections to accept additional sling mounting points or monopod. • Available on any Remington Accessory Chassis System.

Removable rail pieces and longer overall length free-float tube allows the user to minimize or maximize rails to configure the system to the mission



REMINGTON ACCESSORY HANDGUARD (RAHG)

The Remington Defense signature handguard that brought new levels of versatility to the MSR, ACR, R5 and R11 is now available in long (for 14"+ barrels) and short (for 10" barrels) lengths to fit a wide range of 5.56 and 7.62mm carbines. Each Remington Accessory Handguard comes complete with all necessary mounting hardware, an assortment of accessory rails sections that can be positioned on any of 7 planes, integral flush-cup sling swivel receivers, and EO accessory cable routing guides.

SPECIFICATIONS	Long Action	Short Action
Weight	6.1 lbs.	
Overall Length Min LOP Max LOP	36.4" 39.2"	
Overall Length Folded	28.25"	
Order Number	86448	86489

Many other configurations available. Speak with your Remington Defense or Remington Law Enforcement representative today to discuss options including different buttstocks, colors, and even IR-signature reduction coatings. We have a RACS to suit the unique needs of your organization.



M2010 SNIPER WEAPON SYSTEM M2010/M24 (MSR)

M2010 SNIPER WEAPON SYSTEM ORDER # 86442



M24 SNIPER WEAPON SYSTEM

• 24" 7.62 cold-hammer-forged 5R Rifling 416 stainless steel barrel • 1:11.25 twist • Composite aramid fiber-reinforced stock with aluminum bedding block • 5 round internal magazine • Leupold Mark 4 M3 10x day optic • Steel rings and 2-piece base • Target-style iron sights

• Deployment kit and hard case

M24 SNIPER WEAPON SYSTEM (ORDER #25679) Systematically eliminating all variables. The M24 is based on the legendary Model 700 and 40-X rifles. Its unmatched accuracy and reliability have made it the standard in long-range tactical situations, with over 15,000 sold since 1988, and our Sniper Weapon Systems make outfitting your operation as efficient and as simple as possible. From the basic M24 Sniper System – the standard for the U.S. Army since 1988 – to the advanced M2010 configuration, we include the world-famous rifle and all the premium, service-proven components you need. Remington was awarded the U.S. M2010 Army Enhanced Sniper Rifle (ESR) contract in September 2010 to reconfigure up to 3,600 M24 Sniper Weapon Systems after a full and open competition.

M2010 SNIPER WEAPON SYSTEM

Complete packages include:

- M2010 Enhanced Sniper Rifle
- Leupold MK IV ERT 6.5-20x
- AAC TiTan QD Suppressor
- System Hard Case
- Soft Case w/ Removable Mag Pouches
- Day Optic Hard Case
- Deployment Kit w/ Case
- 5 Round Magazine (x5)
- Viking Tactical Sling w/ Flush-Cup Swivels
- Cleaning Kit
- Operator Manual

M2010 SNIPER WEAPON SYSTEMS

Designed as an upgrade to the venerable M24 SWS, the M2010 comes configured with the Remington Arms Chassis System (RACS). The M2010 gives the sniper greater capability, lethality and flexibility offered by the 300 Winchester Magnum round, a detachable box magazine, a Leupold variable powered optic, full rail systems for mounting of ancillary equipment and signature reduction in the form of an AAC TiTAN QD suppressor.



The M24 Sniper Weapon System comes complete with everything you could want in a Hardigg hard case • Leupold Mark 4 M3 day optic • OK Weber competition iron sights • deployment kit which includes spare parts and tools • cleaning kit • scope hard case • weapon soft case and system hard case • Includes bipod • sling anduser manual.





PRECISION SNIPER RIFLE (PSR)

ACTION

TriNyte® coated components are impervious to corrosion • Receiver features titanium alloy with steel-on-steel lock-up in the barrel extension • Ambidextrous bolt release

FOLDING STOCK

The right-folding stock features a bi-directional locking mechanism to minimize the overall system profile • Length of pull is useradjustable • Cheekpiece is adjustable for height and fore/aft position • Height of butt-plate is vertically adjustable



Any AR-style grip can be accommodated

FIRE CONTROL

The MSR® uses the same combat-proven M24 SWS trigger enhanced with the latest anti-corrosion resistant coatings and with user adjustment feature removed. The trigger is set at a pull weight of 3 to 5 lbs. +/- 8 oz.



5, 7, and 10 round Teflon® coated center feed single to double stack magazines for positive feeding • Removable insert to allow greater than standard overall cartridge lengths • Magazines are available in 338 Lapua Magnum (5 round and 10 round), 338 Norma Magnum (5 round and 10 round), 300 Winchester Magnum (7 round), and 7.62mm NATO (10 round)

PRIMARY RAIL

Monolithic, MIL-STD 1913 rail available in 20, 30, and 40 MOA options, allowing a variety of day/night optics to be mounted on the same plane • Integral recoil lug distributes the load from the rail and scope evenly • Optics mounting platform is compatible with HORUS reticle equipped optics, ballistic software, PDA interfaces, night vision devices and thermal imaging devices





BARREL NUT

Accessible without removing the handguard, allows for barrel and caliber changes without disturbing the day optic or any mounted accessories. The supplied torque wrench ensures that barrel installation is consistent, reliable, and repeatable.

ADJUSTABLE BUTTSTOCK

Tool-free adjustment for length of pull, comb height, and recoil pad height, with locking throw levers to ensure that the settings do not change until the operator wants them to.



A new level of surgical precision. Designed for operators, by operators. The Remington® Modular Sniper Rifle (MSR®) combines lethal accuracy at 1500 meters with a user-adjustable folding stock, free-float handguard, and the potential to change barrel lengths and calibers within minutes at the user level from 338 Lapua Magnum to 338 Norma Magnum to 300 Winchester Magnum to 7.62mm NATO. This patent-pending system addresses long and medium-range needs of the modern battlefield in one package designed to meet multiple emerging U.S. Armed Forces requirements. The MSR is mission-adaptable with just a change of a bolt face, barrel and magazine, and features lightweight, efficient design and optimal material selection for performance and corrosion resistance – this system truly never has to leave the battlefield.

SUPPRESSOR

Customer specified suppressor and muzzle brake (AAC Titan recommended – eliminates 98% of muzzle flash, reduces recoil by 60%, 24.25 ounces, 9.5" long – extends 8.8" past the muzzle, 136-137 Db, POI shift <1MOA)



MODULAR HANDGUARD

Octagonal free-float tube design allows for eight planes of accessory rail mounting • Each accessory rail features integral recoil lugs to optimally distribute accessory loads during recoil • MSR features multiple sling attachment points, ventilation for rapid cooling, a unique cable management system, and a flat bottom for increased stability while firing

BARREL

Available in 20", 22", 24" and 27" • Match grade, fluted to minimize weight and optimize heat dissipation without compromising stiffness

Caliber is convertible in minutes at the operator level from 338 Lapua Magnum to 338 Norma Magnum to 300 Winchester Magnum to 7.62mm NATO (with a magazine block for training or field expedient use) Other magnum calibers available upon request



MSR FULL SYSTEM

.338 LM 27" Barrel .300 WM 24" Barrel 7.62mm 20" Barrel Leupold® MKIV ER/T 6.5-20x50 AAC® TiTan-QD™ Suppressor QD Bipod Hard Case w/ Custom Soft Case Insert Deployment Tool and Cleaning Kit

(Order #86280) Many other options available. Contact your Remington Defense or Remington LE rep. to discuss a configuration to match the unique needs of your organization.



R700 BOLT-ACTION RIFLES






R700 LTR TACTICAL WEAPON SYSTEM (ORDER #25635) (308 WIN. CALIBER)

R700 LTR (LIGHT TACTICAL RIFLE)

Legendary R700 action • Receiver machined from ordnance-grade steel • Drilled and tapped for scope mounts
• Three overlapping rings of solid steel (bolt face, barrel and receiver) • Heavy, free-floating 26" barrel (20" fluted barrel on LTR) • Composite stock features with aircraft-grade aluminum bedding block • Non-reflective finish
• Sling swivel studs • Magazine with hinged floor plate • Chambered in 223 Remington, 7mm Remington Mag., 308 Win., 300 Win. Mag. and 300 Remington Ultra Mag. • LTR chambered in 223 Remington, 308 Win., and 300 Remington SA Ultra Mag.







R700 AND MODEL R700 LTR TWS (TACTICAL WEAPON SYSTEMS)

Complete packages include:

Leupold 3.5-10x LR/T with range finding reticle • Badger Ordnance 30mm steel rings • Badger Ordnance steel one-piece Picatinny base • Butler Creek flip-up lens covers • Harris 1A2 bipod
 Uncle Mike's 1" Quick-Adjust sling with swivels • Pelican hard case

3 RINGS OF STEEL

Recessed bolt face completely encloses cartridge head for maximum protection against case rupture.



Barrel surrounds bolt shroud for additional strength.



Barrel threaded into receiver machined from hardened steel.

22



5R BARREL ENHANCEMENT

Specially designed for superior gas seal and reduced bullet deformation, for improved accuracy.



(308 WIN. CALIBER/ FULL SYSTEM)

AND HARRIS BIPOD (ORDER #86445)



SHOTGUNS

EVOLVED TO SERVE IN THE MOST DEMANDING SITUATIONS ON EARTH.

For a half century, Remington combat shotguns have taken more abuse and delivered more victories than any other. A workhorse of dependability, the Model 870 has been the pump shotgun of choice for militaries throughout the free world. It remains the standard by which all pump actions are measured. And ushering in a new era in combat shotguns, the Remington R12 Versa Max Tactical Shotgun and Model 11-87 deliver maximum reliability with minimal maintenance. When conditions and situations are at their worst, Remington military shotguns are at their best.





R870 PUMP-ACTION SHOTGUNS

The nation's leading defender. For a half century, the Remington 870 has been the pump shotgun of choice for government agencies. With over 10 million produced to date, it remains the standard by which all pump actions are measured. Its dual, non-binding action bars deliver ultrasmooth, reliable cycling. Standing the test of time, extreme conditions and duty.

The ultimate pump shotgun, the 870.



FEATURES

Non-binding twin action bars provide smoothest, surest pump operation • Receiver milled from solid block of steel • 3" chambers accept all 2 ¾" and 3" 12 gauge shells • Steellined, grooved fore-end for a stronger grip • Breech block locks into barrel extension for strength and consistent head space • Balanced sear and inertia firing pin prevents discharge unless action is closed and trigger pulled • Flexitab feeding system prevents a misfeed from jamming the shotgun • Cross-bolt safety • Sling swivel studs • Optional engraved insignia and property marks available

R870 OFFERINGS

Multiple barrel lengths with various chokes allow countless configurations for an ideal shotgun for duty, patrol, or entry • 18" or 20" barrels
• Parkerized finish • Multiple sight options available • Magazine extensions available on some standard models • Cylinder, improved cylinder or modified choke • SpeedFeed IV stock version with two magazine tubes holds 4 shells
• SpeedFeed synthetic solid stock and fore-end duplicates the weight and dimensions of factory wood stocks • Less-lethal application shotgun available with blaze orange synthetic SpeedFeed stock and fore-end





EOTECH IFL

The new EOTech IFL (Integrated Forend Light)
LED Forend Light is the first to offer an integrated
LED light. The Remington-LE exclusive version puts
out a blinding 200 lumens of bright, white light
and offers ambidextrous pressure pads for quick
engagements. Durable and dependable, the IFL will
accellerate your advantage.







FEATURES:

Light Output - 200 lumens • Operating Temperature −10 to +50°C • Modes - Off, Constant, Momentary, Strobe • Power Source - 3v Lithium (CR123) • Integral hand stop • Contoured, serrated grip

Available with most 870 shotgun packages or as a separate accessory to retrofit onto your agency's 870 shotguns. Contact your Remington Law Enforcement representative for details.



Receivers machined from a solid, 8-lb. block of ordnance-grade steel define ruggedness.



Magazine Extension Kits



Twin Action Bars




Wilson Combat Ghost Ring rear sight and XS front sight post



Low-profile rifle sights

R870 MCS SHOTGUN SYSTEM



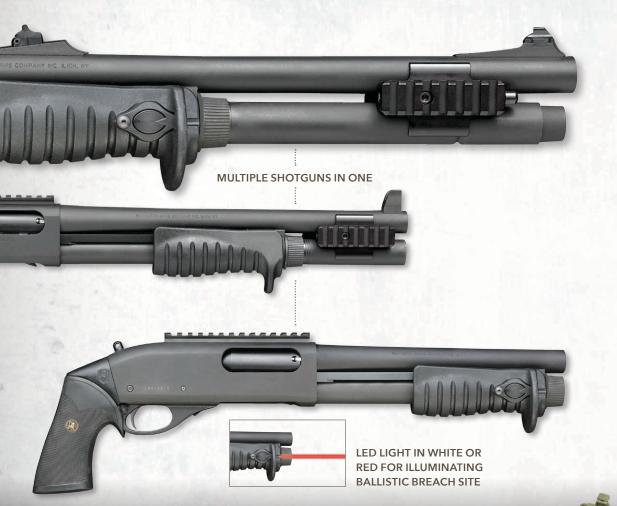

Honing the leading edge. The ability to adapt to the constantly evolving urban battlefield has become a necessary trait of all government agencies. The 870 Modular Combat System (MCS) was built with this fact in mind. Our focus remains on building the most solid and dependable tactical weapons available today.

R870 MODULAR COMBAT SYSTEM (MCS)

Multiple specialized tactical shotguns in one, the R870 Modular Combat System (MCS) is the ultimate choice for virtually any closerange scenario • Modifications are made rapidly without tools thanks to the REM LOC Quick-Change Stock System, truly a revolutionary design for professionals who need to adapt on the fly

Breaching shotgun with 10" barrel with cylinder choke, pistol grip only, and 4 shell capacity • Close-Quarter Combat (CQB) shotgun with 14" barrel and choke tubes, pistol grip stock, and 6 shell capacity • Shotgun with 18" barrel and choke tubes, pistol grip stock, and 7-shell capacity

- Accessory rail for optics V-Tac MK1 sling included Comes with cleaning rod (also acts as a magazine spring guide when assembling)
- Two detachable shell carriers



MCS FULL SYSTEM

18" Rifle Sight Barrel w/ • Choke
Tubes • 14" Bead Sight Barrel w/
Choke Tubes • 10" Breaching Barrel
• QD Pistol Grip • QD Buttstock •
Nylon System Case • Tactical Sling
• Side-Saddle Shell Holder
(ORDER #24973)

R12 VERSA MAX AUTO-LOADING SHOTGUN






Length and Capacity	
18 in.	14.5 in.
6+1	5+1

Stocks		
Synthetic w/ LOP Kit	SFIV Pistol Grip 14" LOP	
Mesa Tactical Urbino Pistol Grip 12" LOP		

Chokes	
Fixed CYL	Fixed IC
Fixed MOD	Rem-Choke System

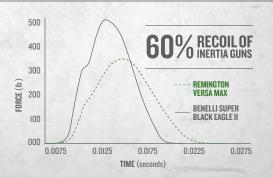

The R12 is the only tactical autoloading shotgun on the market that reliably fires even reduced recoil slug and buckshot interchangeably with standard and high pressure loads. Cold hammer forged from AISI 4140 steel, the 11-12 barrel has the same properties that give the Model 870 its legendary toughness.

Hard coat black anodizing on the receiver, Parkerizing on the barrel, and chrome and nickel-Teflon internal components protect the R12 in even the harshest

environments.

"User-configurable accessory rails located at the 3, 6, and 9 o'clock positions. Allows the operator to install rails in the appropriate location to accommodate their own unique combination of accessories, while leaving extra rails off to keep the weapon's profile smooth and snag-free.

THREE CUSTOM-TUNED ACTIONS INGENIOUSLY DISGUISED AS ONE. 2%" SHELL 7 PORTS OPEN 3" SHELL 4 PORTS OPEN

3 PORTS OPEN

00

ushers in a new era in combat shotguns, from America's oldest gun maker. The R12's self adjusting, short-stroke, dual piston gas operating system provides unmatched versatility and maximum reliability with minimal maintenance. The ability to fire all standard 12-gauge 2 ¾", and 3" loads ensures that the R12 is always ready for any job whether it be ballistic breaching, security operations, or full scale combat. The unique operating system and revolutionary SuperCell recoil pad combine to produce a 12-gauge shotgun that fires magnum loads with almost 20% less recoil than a 20-gauge pump. Options including rifle, bead or ghost-ring sights, 14.5" or 18" hammer-forged barrels, user-configurable forend mounted rails, and a full system of shotgun accessories, ensures that there's an R12 to meet any need. The

R12 combines the legendary reliability, durability, and cutting-

edge technology that only Remington can deliver.

The Remington R12 Versa Max Autoloading Tactical Shotgun

SOFTER SHOOTING

The R12's Versa-Port twin piston gas system, SuperCell recoil pad, and adjustable length of pull stock work together to produce the softest-shooting semi-auto shotgun available. Now, any operator can fire even the heaviest duty loads without discomfort, fire more rounds in training, and get back on their target for quicker follow-up shots. With the ability to interchangeably fire light practice and magnum duty loads, the R12 takes the compromise out of choosing the right ammunition for getting maximum performance out of your shotgun.


VERSATILE RELIABILITY

The Versa-Port gas system automatically regulates the gas system pressure based on the length of the shell being fired allowing 2 3/4", 3" and 3 1/2" shells to be loaded and fired interchangeably. Torture tested with dozens of different loads from various manufacturers, the twin self-cleaning pistons are proven reliable through hundreds of rounds without cleaning.

AMMUNITION

BUILT WITH PRIDE. LOADED WITH CONFIDENCE TO DEFEND.

For more than a century, Remington ammunition has delivered trusted performance for those who serve freedom's cause. Offering superior shot-to-shot consistency and absolute precision for military chamberings, each round is proudly manufactured in the USA to Remington's highest quality standards – expertly engineered and tested to deliver the superior stopping power and terminal ballistics for any situation. For unparalleled performance and day-in, day-out reliability as only Remington can deliver.





PREMIER RIFLE AMMUNITION

Duty and training rifle ammunition. Remington produces a full line of duty and special application ammunition with superb MOA accuracy, consistent point-of-aim/point-of-impact, unbeatable reliability and superior terminal ballistics. Every cartridge combines the highest-quality brass and bullets with specially blended powders. When lives depend on your first shot, you can trust Remington Premier rifle ammunition.

REMINGTON PREMIER CORE-LOKT ULTRA BONDED

Lead core metallurgically adheres to a progressively tapered jacket, specifically designed to control expansion • Combines maximum penetration, controlled 1.8x expansion, and 95% original weight retention • Bullet maintains maximum integrity and stays on target through tough barriers • Available in 223 Remington, 308 Win., 7mm Remington Mag., 300 Win. Mag., 300 Remington Mag., 30-06 Sprg., 300 Remington SA Ultra Mag. and others • Loaded in the USA



REMINGTON PREMIER ACCUTIP

Precision-engineered deformation-resistant polymer tip provides match type accuracy, positive feed and function reliability, and maximum ballistic coefficient • Effectively reduces the chance of over-penetration and ricochet while maximizing energy transfer • Available in 223 Remington, 7mm Remington Mag., 308 Win., 30-06 Sprg., 300 Win. Mag. and others • Loaded in the USA





REMINGTON PREMIER MATCH

Loaded with Sierra MatchKing boat-tail bullets, high-grade primers, and specially blended powders for consistent velocity and exceptional accuracy • Available in 308 Win. - 168 at 175 gr., 223 Remington – 69 and 77 gr., and 6.8mm Remington SPC – 115 gr. • Other Premier Match loads are available in 223 Remington - 62 gr. HP Match and 338 Lapua Magnum – 250 gr. Scenar Match



308 Match

300 AAC BLACKOUT

The 300 AAC BLACKOUT (7.62x35mm) was designed specifically to meet the needs of U.S. Special Forces to deliver lethal energy, quietly, from suppressed carbines and precision rifles. From 0 to 300 meters, supersonic .300 AAC BLACKOUT offers approximately 27-35% more energy from a 9 inch barrel than 5.56mm M855 when shot from a 10 inch barrel with much less powder and resulting muzzle blast. Also available is a high-mass subsonic load for quieter use with a sound suppressor which provides 115% more energy than an MP5-SD at the muzzle and 165% more at 200 meters.

Remington Defense offers a range of rifles including the R4 carbine and 700 ready to meet the needs of any operator looking for the ultimate in quiet, lethal precision.

AVAILABLE LOADS

ORDER # DESCRIPTION

	ORDER #	DESCRIPTION
	21509	220 gr. OTM - Subsonic
	21503	125 gr. OTM - Supersonic
	21504	125 gr. CTFB - Supersonic
	23148	Primed Brass
ed		assect of Children
and		Harring May Out of Reach of Children Harring May Out of Reach of Children Growth of A Processing the Abriele De Children Har Endander Garden for the Reach of E.S. Har Endander Garden E. C. A. R. T. R. I. D. G. E.S.
	- 高面昌	Harming, Alego Dada Manua Cartavanas A Prince aciona Cartavia Cartavanas A Prince aciona Cartavia Historia Garden Charles Hasay De La Ratific Das E S Historia Garden Charles Hasay De La Ratific Das E S RIFLE CARTRIDGES
		Remington. Remington. Resource Subsonic Response Subsonic Response Subsonic
		mingluit
	The same	RO UN SUBSONIC
		300 AAC BLACKOUT - SUBSC. 300 CENTERFIRE RIFLE CARTRIDGES 20 CENTERFIRE RIFLE CARTRIDGES
		300 AAC BLACK
	4 5	20 CENITO
	21	05/11/65
	-	
8	220	
	の の 中田田	
The second second		00
1.0		
AU	A IF	
1111		
The same of the same of	The state of the s	34
THE PERSON NAMED IN		

GOLDEN SABER BLACK BELT



A breakthrough in threat-stopping performance.

Introducing Golden Saber Black Belt – engineered in conjunction with law enforcement professionals, for law-enforcement professionals, and now available to anyone seeking the pinnacle of stopping power. Extensively proven in FBI barrier testing to deliver massive, reliable expansion and deep penetration in every medium. All thanks to the bullet's proprietary black Mechani-Lokt belt that firmly locks the jacket to the core for unfailing integrity in the most extreme personal defense scenarios. It's available in 9mm, 40 S&W and 45 Auto, and always ready to defend when called upon.

CORROSION RESISTANT

nickel-plated case for reliable feed and function

FLASH SUPPRESSED

propellant for minimal muzzle flash



WATERPROOF SEAL

at the neck and primer pocket for added reliability

PRIMER OPTIMIZED

for consistent ignition and reduced muzzle flash

A PERSONAL DEFENSE LOAD OF THE HIGHEST RANK.

HOLLOW POINT

Cavity optimized for devastating expansion and terminal performance

2 MECHANI-LOKT BELT

Locks jacket and core together for supreme terminal performance

3 HOURGLASS SHAPE

Mechanically locks the lead in the rear portion of bullet to ensure jacket retention even when encountering the toughest of barriers 4 PROVEN DESIGN

Bullet designed, tested and proven against the exhausting barrier FBI ballistics test

5 DRIVING BAND

Located at the bullet's rear, the Driving Band is the larger base diameter behind the bore diameter



Golden Saber	Black Belt		
Cartridge	Index/EDI no.	Bullet Wt. (gr.)	Bullet Type
9mm Luger +P ‡	GSN9MMBB	124	Belted Brass Jacketed Hollow Point
9mm Luger	GSN9MMDB	124	Belted Brass Jacketed Hollow Point
40 S&W	GSN40SWBB	180	Belted Brass Jacketed Hollow Point
45 Auto	GSN45APBB	230	Belted Brass Jacketed Hollow Point

‡Ammunition with "+P" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the manufacturer. For more information on ballistics, see pages 207-210.





6 SPIRAL NOSE CUTS

Ensures reliable controlled expansion through clogging barriers such as wall board and heavy clothing

HIGH-PERFORMANCE BRASS JACKET

Provides consistent, predictable expansion, penetration and weight retention

GOLDEN SABER BONDED GOLDEN SABER HPJ



Golden Saber Bonded All the revolutionary features that make Golden Saber rounds the leading edge in tactical handgun rounds, along with the unmatched barrier-penetration performance of our special bonded-bullet design.

The standard for barrier-penetration performance
• Through exclusive Remington process, lead core
hot-bonded to brass jacket • Exceptional weight
retention – up to 97% through auto glass • Reduced
bullet nose diameter for precise bore alignment
and match-grade accuracy • Requires less energy
to initiate expansion • Jacket stiffness and wall
thickness optimized to eliminate over-expansion, thus
maximizing penetration • Available in 357 SIG, 9mm
Luger, 40 S&W and 45 Auto • Loaded in the USA



Golden Saber HPJ Bonded 9mm Luger, 147-gr., 25 yds. 10 Shots, .9"



9mm Luger, 147-gr.
Auto Glass @ 10'
1.5x expansion



40 S&W, 180-gr. Auto Glass @ 10' 1.6x expansion



45 Auto, 230-gr. Auto Glass @ 10 1.4x expansion

Sequence of high-speed photography showing the superior performance of Golden Saber HPJ Bonded through auto glass. Shot was set up to mimic one taken from the left front quarter of a vehicle. Frame 1: 230-gr., 45 caliber Golden Saber Bonded bullet impacts typical windshield glass. Frames 2-4: Bullet passes through windshield. Frame 5: Emerges from the glass intact. Jacket and core held together through ASI ¼-inch laminated safety glass.

PUNCHES THROUGH BARRIERS AND DELIVERS SUPERIOR TERMINAL PERFORMANCE BEYOND.





GOLDEN SABER HPJ BONDED

bullets have the same industry-exclusive Driving Band profile that centers the bullet perfectly in the bore as it moves into the rifling. This results in match-grade accuracy and higher velocity conservation.

GOLDEN SABER HPJ (HIGH-PERFORMANCE JACKET)

Industry-exclusive Driving Band • Jacket made entirely of cartridge brass • Nickel-plated cases for more reliable feeding • Waterproofed primers and case mouths provide max integrity in all weather conditions • Virtually 100% weight retention • Precise hollow-point cavity design maximizes penetration by minimizing lead core deformation • Flash-suppressed powders allow faster low-light target reacquisition • Reduced bullet nose diameter for precise bore alignment and match-grade accuracy • Optimum barrier penetration and expansion through a full range of accepted barrier tests • Available in 380 Auto, 9mm Luger, 38 Special, 357 Mag., 40 S&W and 45 Auto • Loaded in the USA



This series of photos shows the totally controlled and extremely uniform expansion of Golden Saber HPJ bullets.



A block of gelatin placed 10" beyond the auto-glass setup to catch the bullet. Even after smashing through safety glass, the 45-cal. Golden Saber Bonded still delivers a large-volume stretch cavity with over 12" of penetration.



GOLDEN SABER HPJ (HIGH-PERFORMANCE JACKET) HANDGUN BARRIER TEST RESULTS

GOLDEN SABER BONDED

HEAVY CLOTHING @ 10 FEET











Weight: 180-gr. Penetration: 14.4" Expansion: .67" (1.7x) Weight Retention: 100%



45 AUTO

Weight 230-gr. Penetration: 16.1" Expansion: .71" (1.6x) Weight Retention: 100%

AUTO GLASS @ 10 FEET





9MM LUGER Weight: 147-gr. Penetration: 12.1" Expansion: .55" (1.6x)



40 S&W

Weight: 180-gr. Penetration: 11.2" Expansion: .62" (1.6x) Weight Retention: 97%

Weight Retention: 92%



45 AUTO Weight 230-gr.

Penetration: 12.5" Expansion: .63" (1.4x) Weight Retention: 96%

WALLBOARD @ 10 FEET





9MM LUGER (WALLBOARD)

Weight: 147-gr. Penetration: 13.8" Expansion: .60" (1.7x) Weight Retention: 100%

STEEL @ 10 FEET





9MM LUGER (STEEL)

Weight: 147-gr. Penetration: 21.4" Expansion: .42" (1.2x) Weight Retention: 100%

BALLISTIC PERFORMANCE 40 S&W 165-GR. GOLDEN SABER HPJ MUZZLE FLASH COMPARISON

All Golden Saber powders are treated with a chemical flash suppressant that retards flame propagation. This minimizes night blindness for the shooter while helping to conceal location.



Regular 40 S&W



Golden Saber 40 S&W

GOLDEN SABER HPJ (HIGH-PERFORMANCE JACKET)

HEAVY CLOTHING @ 10 FEET





357 MAGNUM

Weight: 125-gr. Penetration: 15.7" Expansion: .59" (1.7x) Weight Retention: 100%





9MM LUGER

Weight: 124-gr. Penetration: 11.9" Expansion: .62" (1.8x) Weight Retention: 99.9%





40 S&W

Weight: 180-gr. Penetration: 13.0" Expansion: .68" (1.7x) Weight Retention: 99.9%



45 AUTO

Weight 230-gr. Penetration: 18.8" Expansion: .73" (1.6x) Weight Retention: 99.8%

HEAVY CLOTHING @ 20 YARDS





9MM LUGER

Weight: 147-gr. Penetration: 13.2" Expansion: .66" (1.9x) Weight Retention: 100%

WALLBOARD @ 10 FEET





45 AUTO

Weight 230-gr. Penetration: 15.3" Expansion: .72" (1.6x) Weight Retention: 99.7%

STEEL @ 10 FEET





40 S&W Weight 180-gr. Penetration: 16.3" Expansion: .51" (1.3x) Weight Retention: 99.7%

GOLDEN SABER BONDED

Primer	Index Number – GSB9MMD RAMAC – 29351
-nmer Load	1 ½ 9mm Luger +P
Bullet Weight/Style	124-gr. BJHP-Bonded
Jacket Material	Brass (Copper alloy 260)
Core Material	100% Lead
Muzzle Velocity	1180 fps using a 4" SAAMI standard test barrel
Muzzle Energy	384 ftlbs.
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 11.3 inches Expansion: .54 inch dia. (1.7x) Weight Retention: 90%
9mm Luger	Index Number – GSB9MMC RAMAC – 29353
Primer	1 ½
Load	Standard
Bullet Weight/Style	147-gr. BJHP-Bonded
Jacket Material	Brass (Copper alloy 260)
Core Material	100% Lead
Muzzle Velocity	990 fps using a 4" SAAMI standard test barrel
Muzzle Energy	320 ftlbs.
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 11.3 inches Expansion: .54 inch dia. (1.7x) Weight Retention: 90%
357 Sig	Index Number – GSB357SB RAMAC – 29408
Primer	5 ½
Load	Standard
Bullet Weight/Style	125-gr. BJHP-Bonded
Jacket Material	Brass (Copper alloy 260)
Core Material	99.25% Lead, .75% Antimony
Muzzle Velocity	1350 fps using a 4" SAAMI standard test barrel
Muzzle Energy	506 ftlbs.
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 12.3 inches Expansion: .58 inch dia. (1.6x) Weight Retention: 82%
40 S&W	Index Number – GSB40SWA RAMAC – 29366
Primer	5 ½
Load	Standard
Bullet Weight/Style	165-gr. BJHP-Bonded
Jacket Material	Brass (Copper alloy 260)
Core Material	100% Lead
Muzzle Velocity	1150 fps using a 4" SAAMI standard test barrel
Muzzle Energy	485 ftlbs.
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)
Bullet Performance	4" pistol, auto glass @ 10 ft., average values Penetration: 11.4 inches Expansion: .71 inch dia. (1.8x) Weight Retention: 92%
40 S&W	Index Number – GSB40SWB RAMAC – 29436
Primer	5 ½
Load	Standard 100 B H D D L L
Bullet Weight/Style	180-gr. BJHP-Bonded
Jacket Material	Brass (Copper alloy 260)
Core Material	99.25% Lead, .75% Antimony
Muzzle Velocity	1015 fps using a 4" SAAMI standard test barrel
Muzzle Energy Accuracy	412 ftlbs.
	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)
	4" pistol, auto glass @ 10 ft., average values Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97%
Bullet Performance	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97%
Bullet Performance 45 AUTO	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97%
Bullet Performance 45 AUTO Primer	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416
Bullet Performance 45 AUTO Primer Load	Penetration: 11:2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416 2 ½
Bullet Performance 45 AUTO Primer Load Bullet Weight/Style	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416 2 ½ Standard
Bullet Performance 45 AUTO Primer Load Bullet Weight/Style Jacket Material	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416 2 ½ Standard 230-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead
Bullet Performance 45 AUTO Primer Load Bullet Weight/Style Jacket Material Core Material	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416 2 ½ Standard 230-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead 875 fps using a 5" SAAMI standard test barrel
Bullet Performance 45 AUTO Primer Load Bullet Weight/Style Jacket Material Core Material Muzzle Velocity	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416 2 ½ Standard 230-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead 875 fps using a 5* SAAMI standard test barrel 391 ftlbs.
AUTO Primer Load Bullet Weight/Style Jacket Material Core Material Muzzle Velocity Muzzle Energy Accuracy	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416 2 ½ Standard 2 30-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead 875 fps using a 5" SAAMI standard test barrel 391 ftlbs. 2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system)
Bullet Performance 45 AUTO Primer Load Bullet Weight/Style Jacket Material Core Material Muzzle Velocity Muzzle Energy Accuracy	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416 2 ½ Standard 230-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead 875 fps using a 5" SAAMI standard test barrel 391 ftlbs.
AS AUTO Primer Load Bullet Weight/Style Jacket Material Core Material Wuzzle Velocity Muzzle Energy Accuracy Bullet Performance	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416 2 ½ Standard 230-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead 875 fps using a 5" SAAMI standard test barrel 391 ftlbs. 2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system) 5" pistol, auto glass @ 10 ft., average values Penetration: 12.5 inches Expansion: .63 inch dia. (1.4x) Weight Retention: 96%
AS AUTO Primer Load Bullet Weight/Style Jacket Material Core Material Muzzle Velocity Muzzle Vergy Accuracy Bullet Performance	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416 2 ½ Standard 230-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead 875 fps using a 5" SAAMI standard test barrel 391 ftlbs. 2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system) 5" pistol, auto glass @ 10 ft., average values Penetration: 12.5 inches Expansion: .63 inch dia. (1.4x) Weight Retention: 96% Index Number – GSB45APA RAMAC – 29414
Bullet Performance 45 AUTO Primer Load Bullet Weight/Style Jacket Material Muzzle Velocity Muzzle Energy Accuracy Bullet Performance 45 AUTO Primer	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416 2 ½ Standard 2 30-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead 875 fps using a 5" SAAMI standard test barrel 391 ftlbs. 2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system) 5" pistol, auto glass @ 10 ft., average values Penetration: 12.5 inche Expansion: .63 inch dia. (1.4x) Weight Retention: 96% Index Number – GSB45APA RAMAC – 29416
AS AUTO Primer Load Bullet Weight/Style Jacket Material Core Material Muzzle Velocity Muzzle Energy Accuracy Bullet Performance 45 AUTO Primer Load	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416 2 ½ Standard 230-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead 875 fps using a 5" SAAMI standard test barrel 391 ftlbs. 2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system) 5" pistol, auto glass @ 10 ft., average values Penetration: 12.5 inches Expansion: .63 inch dia. (1.4x) Weight Retention: 96% Index Number – GSB45APA RAMAC – 29414
Bullet Performance 45 AUTO Primer Load Bullet Weight/Style Jacket Material Core Material Muzzle Velocity Muzzle Energy Accuracy Bullet Performance 45 AUTO Primer Load Bullet Weight/Style Jacket Material	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416 2 ½ Standard 230-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead 875 fps using a 5" SAAMI standard test barrel 391 ftlbs. 2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system) 5" pistol, auto glass @ 10 ft., average values Penetration: 12.5 inches Expansion: .63 inch dia. (1.4x) Weight Retention: 96% Index Number – GSB45APA 2 ½ Standard 185-gr. BJHP-Bonded Brass (Copper alloy 260)
Bullet Performance 45 AUTO Primer Load Bullet Weight/Style Jacket Material Core Material Muzzle Velocity Muzzle Energy Accuracy Bullet Performance 45 AUTO Primer Load Bullet Weight/Style Jacket Material	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416 2 ½ Standard 230-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead 875 fps using a 5" SAAMI standard test barrel 391 ftlbs. 2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system) 5" pistol, auto glass @ 10 ft., average values Penetration: 12.5 inches Expansion: .63 inch dia. (1.4x) Weight Retention: 96% Index Number – GSB45APA 2 ½ Standard 185-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead
AS AUTO Primer Load Bullet Weight/Style Jacket Material Core Material Muzzle Velocity Muzzle Energy Accuracy Bullet Performance 45 AUTO Primer Load Bullet Weight/Style Load Bullet Weight/Style Load Core Material Core Material	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416 2 ½ Standard 230-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead 875 fps using a 5° SAAMI standard test barrel 391 ftlbs. 2.8° Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system) 5° pistol, auto glass @ 10 ft. average values Penetration: 12.5 inche Expansion: .63 inch dia. (1.4x) Weight Retention: 96% Index Number – GSB45APA 2 ½ Standard 185-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead 1015 fps using a 5° SAAMI standard test barrel
Sullet Performance 45 AUTO Primer Load Bullet Weight/Style Jacket Material Core Material Muzzle Velocity Muzzle Energy Accuracy Bullet Performance 45 AUTO Primer Load Bullet Weight/Style Jacket Material Core Material Core Material Core Material Muzzle Velocity Muzzle Velocity Muzzle Fenergy	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416 2 ½ Standard 230-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead 875 fps using a 5" SAAMI standard test barrel 391 ftlbs. 2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system) 5" pistol, auto glass @ 10 ft., average values Penetration: 12.5 inches Expansion: .63 inch dia. (1.4x) Weight Retention: 96% Index Number – GSB45APA 2 ½ Standard 185-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead
AS AUTO Primer Load Bullet Weight/Style Jacket Material Core Material Muzzle Velocity Muzzle Energy Accuracy Bullet Performance AS AUTO Primer Load Bullet Weight/Style Jacket Material Muzzle Core Material Muzzle Velocity	Penetration: 11.2 inches Expansion: .62 inch dia. (1.7x) Weight Retention: 97% Index Number – GSB45APB RAMAC – 29416 2 ½ Standard 230-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead 875 fps using a 5° SAAMI standard test barrel 391 ftlbs. 2.8° Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system) 5° pistol, auto glass @ 10 ft., average values Penetration: 12.5 inche Expansion: .63 inch dia. (1.4x) Weight Retention: 96% Index Number – GSB45APA 2 ½ Standard 185-gr. BJHP-Bonded Brass (Copper alloy 260) 100% Lead 1015 fps using a 5° SAAMI standard test barrel

GOLDEN SABER HPJ (HIGH-PERFORMANCE JACKET)

9mm Luger	Index Number – GS9MMC RAMAC – 29422
Primer	1 ½
Load	Standard
Bullet Weight/Style	147-gr. BJHP
Jacket Material	Brass (Copper alloy 260)
Core Material	100% Lead
Muzzle Velocity	990 fps using a 4" SAAMI standard test barrel
Muzzle Energy	320 ftlbs.
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)
Bullet Performance	4" pistol, 10% ordnance gelatin @ 10 ft., average values
	Penetration: 12.8 inches Expansion: .66 inch dia. (1.8x) Weight Retention: 100%
9mm Luger +P	Index Number – GS9MMD RAMAC – 29424
Primer	5 ½
Load	+P
Bullet Weight/Style	124-gr. BJHP
Jacket Material	Brass (Copper alloy 260)
Core Material	99.25% Lead, .75% Antimony
Muzzle Velocity	1180 fps using a 4" SAAMI standard test barrel
Muzzle Velocity Muzzle Energy	384 ftlbs.
	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)
Accuracy Bullet Performance	
bullet reflormance	4" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 14.3 inches Expansion: .54 inch dia. (1.5x) Weight Retention: 99.9%
40 S&W	Index Number - GS40SWA RAMAC - 29440
Primer	5 ½
Load	Standard 1/5 - BUID
Bullet Weight/Style	165-gr. BJHP
Jacket Material	Brass (Copper alloy 260)
Core Material	99.25% Lead, .75% Antimony
Muzzle Velocity	1150 fps using a 4" SAAMI standard test barrel
Muzzle Energy	485 ftlbs.
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)
Bullet Performance	4" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 14.1 inches Expansion: .60 inch dia. (1.5x) Weight Retention: 100%
40 S&W	Index Number – GS40SWB RAMAC – 29442
Primer	5 ½
Load	Standard
Bullet Weight/Style	180-gr. BJHP
Jacket Material	Brass (Copper alloy 260)
Core Material	99.25% Lead, .75% Antimony
Muzzle Velocity	1015 fps using a 4" SAAMI standard test barrel
Muzzle Energy	412 ftlbs.
Accuracy	2.0" Max. avg. extreme spread @ 25 yards (Three 5 round groups using a universal receiver test system)
Bullet Performance	4" pistol, 10% ordnance gelatin @ 10 ft., average values
Duliet i crioimanee	Penetration: 12.3 inches Expansion: .68 inch dia. (1.7x) Weight Retention: 99.9%
45 AUTO	Index Number – GS45APA RAMAC – 29444
Primer	2 ½
Load	Standard
Bullet Weight/Style	230-gr. BJHP
Jacket Material	Brass (Copper alloy 260)
Core Material	99.25% Lead, .75% Antimony
	1015 fps using a 5" SAAMI standard test barrel
Muzzle Velocity	423 ftlbs.
Muzzle Energy	
Accuracy Bullet Performance	2.8" Max. avg. extreme spread @ 50 yards (Three 5 round groups using a universal receiver test system)
	5" pistol, 10% ordnance gelatin @ 10 ft., average values Penetration: 14.8 inches Expansion: .60 inch dia. (1.3x) Weight Retention: 100%
45 AUTO	Index Number – GS45APB RAMAC – 29448
	2 1/2
Load	Standard
Load	
Load Bullet Weight/Style	Standard
Load Bullet Weight/Style Jacket Material	Standard 230-gr. BJHP
Load Bullet Weight/Style Jacket Material Core Material	Standard 230-gr. BJHP Brass (Copper alloy 260) 100% Lead
Load Bullet Weight/Style Jacket Material Core Material Muzzle Velocity	Standard 230-gr. BJHP Brass (Copper alloy 260)
Load Bullet Weight/Style Jacket Material Core Material Muzzle Velocity Muzzle Energy	Standard 230-gr. BJHP Brass (Copper alloy 260) 100% Lead 875 fps using a 5" SAAMI standard test barrel 391 ftlbs.
Primer Load Bullet Weight/Style Jacket Material Core Material Muzzle Velocity Muzzle Energy Accuracy Bullet Performance	Standard 230-gr. BJHP Brass (Copper alloy 260) 100% Lead 875 fps using a 5" SAAMI standard test barrel

SLUGS 12 GAUGE DUTY SHELLS

En-gauge and immobilize. For close-range tactical scenarios, Remington 12 gauge ammunition is a clean sweep. Our selection of street-proven slugs and buckshot has been perfected over decades in the field. We match the finest components with rigid standards for quality control to create the only shotgun loads worthy of a trip down a Remington tactical shotgun barrel.



12 gauge slugs are available in full power and reduced recoil for duty and training conditions. While the Slugger Rifled Slugs remain the industry standard, the Reduced Recoil Rifled Slugs generate 45% less recoil than a standard 1-oz. rifled slug. In the field or on the course, Remington provides the perfect slugs for any shotgun duty use.

REDUCED RECOIL RIFLED SLUGS

Specifically engineered to improve a shooter's capabilities with a shotgun • Generate 45% less recoil than a standard 1-oz. rifled slug • Helps during training and encourages shotgun duty use • Point-of-Impact is identical to a standard 1-oz. slug out to 50 yards and only 1 ½" lower at 100-yards • High-density polymer alignment disk under the slug's base produces enhanced accuracy • Waterproof primer for maximum reliability

Reduced Recoil Slug 12 ga., 2 ¾", 1-oz. slug, 10 shots, 25 yards, I.C. Choke, 1,200 FPS





COLOR CODE YOUR LOADS

Remington slug hulls are now offered in optional Peters blue for rapid differentiation from buckshot loads • All buckshot hulls remain in standard "Remington Green" • With this Remington feature, personnel can easily distinguish between slugs and buckshot loads



SLUGGER RIFLED SLUGS

Larger slug diameter for better gas sealing • High-density polymer disk under the slug produces a perfectly aligned exit from the muzzle for dramatically enhanced accuracy



Full Velocity Slugger
12 ga., 2 ¾", 1-oz. slug,
10 shots, 25 yards,
I.C. Choke,
1,560 FPS

FRANGIBLE SABOT SLUGS

Reliable lead-free and heavy-metal-free primer • Lead-free slugs produce instant, complete breakup when impacting steel targets and steel backstops • Optimized powder blends for efficient utilization with minimum unburned residue • Accuracy performance nearly equivalent to conventional loads • Slug fragment splash-back virtually eliminated



TACTICAL BUCKSHOT 12 GAUGE DUTY SHELLS

TAC 8 00-BUCKSHOT

A full load 8-pellet 00-Buck that boasts a highly concentrated ½" to ¾" per yard pattern spread • Pattern controlled by utilizing 00-buck with 3% antimony lead and a precisely loaded special shot cup • Waterproof primer and mouth for maximum reliability under harsh environmental conditions









5 ROUNDS OF TAC 8 fired at 15 yards, IC Choke



BUCKSHOT

Available in standard and magnum loadings and 5 buckshot sizes: 000, 00, 0, 1 and 4 • Provides reliability, consistency and stopping power • Our 9-pellet 00-Express LE Buckshot created a new standard of pattern performance with the addition of our one-piece compression section Power Piston wad column, polymer buffering and hard lead pellets • This combination produces patterns 25% tighter than previous buckshot offerings



REDUCED-RECOIL 00-BUCKSHOT

Made specifically for duty and training applications that encourage shotgun usage • Our 8- or 9-pellet Reduced-Recoil 00-Buckshot produces lower felt recoil by 40% for better follow-up shots • Enhanced with Power Piston shot cup, polymer buffering, and hardened 3% antimony lead pellets contributing to outstanding patterns



FOR
MILITARY & LAW
ENFORCEMENT USE ONLY

TB12 BREACHING ROUND

TB12 is a mission-specific shotgun ballistic breaching round used to defeat a variety of urban structures to include exterior and interior doors. TB12 provides a dramatic reduction in collateral damage to noncombatants as well as operators through the use of a frangible material that delivers maximum energy to the breach point yet turns to a near harmless powder upon impact. TB12 is a cost-effective training and operational breaching round allowing

operators to "train as they fight." The frangible property of TB12 delivers near-threat lethality in addition to being a superb breaching round, ensuring that the breacher remains operational regardless of the weapon system being used.





DISINTEGRATOR

Disintegrator Lead-Free Jacketed Frangible is available in 223 Remington, 9mm Luger (+P) and 40 S&W.

Disintegrator CTF (Copper Tin Frangible) is available in 9mm Luger (+P), 40 S&W and 45 Auto.



Bullet does not rise more than 1" above line of sight from muzzle to sighting-in range.

REMINGTON CENTERFIRE RIFLE CARTRIDGES (Packed 20 rounds per box, 10 boxes per case, 200 rounds per case)

CALIBER	INDEX IDI	RAMAC	PRIMER	WT.	BULLET STYLE	VELC	OCITY (FT./	(SEC.)	EN	ERGY (FT./L	BS.)		SH	ORT-RANG	E TRAJECTO	ORY		BALLISTIC
	NO.	NO.	NO.	(G.)		MUZZLE	100 YDS.	200 YDS.	MUZZLE	100 YDS.	200 YDS.	50 YDS.	100 YDS.	150 YDS.	200 YDS.	250 YDS.	300 YDS.	COEFFICIENT
223 Remington	PRA223RB	29184	7 1/2	50	AccuTip, Boat Tail	3410	2989	2605	1291	992	753	-0.1	0.4	ZERO	-1.5	-4.4	-8.7	0.242
	PRA223RC	29192	7 1/2	55	AccuTip, Boat Tail	3240	2854	2500	1282	995	763	0.2	0.6	ZERO	-1.8	-5.1	-9.9	0.255
	R223R1	28399	7 1/2	55	PSP	3240	2747	2304	1282	921	648	0.0	0.6	ZERO	-2.0	-5.6	-11.2	0.197
	R223R2	29047	7 1/2	55	HP, Power-Lokt	3240	2773	2352	1282	939	675	0.0	0.6	ZERO	-1.9	-5.4	-10.7	0.209
	R223R3	28401	7 1/2	55	FMJ	3240	2759	2326	1282	929	660	0.0	0.6	ZERO	-1.9	-5.5	-11.0	0.202
	R223R6	22106	7 1/2	62	HP (Match)	3025	2572	2162	1260	911	643	0.2	0.7	ZERO	-2.3	-6.5	-12.9	0.205
	RM223R1	27680	7 1/2	69	BTHP (Match)	3000	2720	2457	1379	1133	925	0.1	0.6	ZERO	-1.9	-5.3	-10.3	0.336
	RM223R3	27686	7 1/2	77	BTHP (Match)	2800	2551	2314	1340	1112	916	0.3	0.8	ZERO	-2.3	-6.2	-11.8	0.375
6.8mm Remington SPC	R68R1	29146	9 1/2	115	OT (Match)	2625	2373	2135	1759	1437	1163	0.4	1.0	ZERO	-2.7	-7.3	-14.1	0.344
	RM68R1	27676	9 1/2	115	BTHP (Match)	2625	2365	2119	1759	1428	1147	0.5	1.0	ZERO	-2.7	-7.4	-14.3	0.333
308 Win.	R308W1	27842	9 1/2	150	PSP, Core-Lokt	2820	2533	2263	2648	2137	1705	0.0	ZERO	-1.2	-3.9	-8.4	-14.7	0.314
	RM308W7	21485	9 1/2	168	BTHP (Match)	2680	2493	2314	2678	2318	1998	-0.1	ZERO	-1.3	-4.1	-8.5	-14.7	0.475
	RM308W8	21486	9 1/2	175	BTHP (Match)	2610	2421	2241	2647	2278	1951	0.4	0.9	ZERO	-2.5	-6.8	-13.0	0.496
	PRC308WC	29116	9 1/2	180	Core-Lokt Ultra Bonded	2620	2404	2198	2743	2309	1930	0.0	ZERO	-1.4	-4.5	-9.4	-16.3	0.402
	R308W3	21479	9 1/2	180	PSP, Core-Lokt	2620	2393	2178	2743	2288	1896	0.0	ZERO	-1.5	-4.6	-9.5	-16.5	0.383
30-06 Sprg.	R30062	27826	9 1/2	150	PSP, Core-Lokt	2910	2617	2342	2820	2281	1827	0.2	0.7	ZERO	-2.2	-5.9	-11.4	0.314
	R30063	21405	9 1/2	150	BRPT	2910	2656	2416	2820	2349	1944	0.2	0.7	ZERO	-2.0	-5.6	-10.8	0.365
	R3006B	21415	9 1/2	165	PSP, Core-Lokt	2800	2534	2283	2872	2352	1909	0.3	0.8	ZERO	-2.3	-6.3	-12.1	0.339
	R30064	21407	9 1/2	180	SP, Core-Lokt	2700	2348	2023	2913	2203	1635	0.0	ZERO	-1.5	-4.9	-10.3	-18.3	0.248
	R30065	27828	9 1/2	180	PSP, Core-Lokt	2700	2469	2250	2913	2436	2023	0.0	ZERO	-1.3	-4.2	-8.8	-15.4	0.383
	R30067	27830	9 1/2	220	SP, Core-Lokt	2410	2130	1870	2837	2216	1708	0.1	ZERO	-2.0	-6.2	-12.9	-22.4	0.294
300 Remington SA Ultra Mag.	PR300SM1	27952	9 ½ M	150	PSP, Core-Lokt Ultra	3200	2901	2622	3410	2803	2290	0.1	0.5	ZERO	-1.6	-4.6	-8.9	0.330
	PR300SM2	27954	9 ½ M	165	SP, Core-Lokt Ultra	3075	2792	2527	3464	2856	2339	0.1	0.6	ZERO	-1.8	-5.0	-9.7	0.339
300 Win. Mag.	R300W1	29495	9 ½ M	150	PSP, Core-Lokt	3290	2950	2634	3605	2897	2311	0.0	0.5	ZERO	-1.6	-4.4	-8.7	0.294
	PRC300WC	29032	9 ½ M	180	Core-Lokt Ultra Bonded	2960	2774	2505	3501	2971	2508	0.1	0.6	ZERO	-1.9	-5.2	-10.0	0.402
	PRA300WC	29212	9 ½ M	180	AccuTip, Boat Tail	2960	2764	2577	3501	3053	2653	0.1	0.6	ZERO	-1.8	-4.9	-9.5	0.481
	R300W2	29497	9 ½ M	180	PSP, Core-Lokt	2960	2715	2482	3501	2945	2463	0.1	0.6	ZERO	-1.9	-5.3	-10.2	0.383
	RM300W7	27684	9 ½ M	190	BTHP (Match)	2900	2725	2557	3547	3133	2758	0.1	0.6	ZERO	-1.9	-5.1	-9.8	0.533
7mm Rem. Mag.	PRA7MMRB	29206	9 ½ M	150	AccuTip, Boat Tail	3110	2926	2749	3221	2850	2516	0.0	0.5	ZERO	-1.6	-4.3	-8.2	0.530
	R7MM2	29487	9 ½ M	150	PSP, Core-Lokt	3110	2830	2568	3221	2667	2196	0.0	0.6	ZERO	-1.7	-4.8	-9.3	0.346
	RS7MMA	27893	9 ½ M	160	PSP, A-Frame	2900	2659	2430	2987	2511	2097	0.2	0.7	ZERO	-2.0	-5.5	-10.7	0.382
	R7MM3	27814	9 ½ M	175	PSP, Core-Lokt	2860	2645	2440	3178	2718	2313	0.2	0.7	ZERO	-2.1	-5.6	-10.7	0.427
338 Lapua Magnum	RM338LMR1	27944	9 ½ M	250	Scenar	2960	2820	2683	4863	4412	3996	0.3	0.6	ZERO	-1.7	-4.7	-8.9	0.675

Bullet Style Descriptions: OT=Open Tip / BTHP=Boat Tail Hollow Point / BRPT=Bronze Point / HP=Hollow Point / MC=Metal Case / PSP-Pointed Soft Point / SP=Soft Point

UMC CENTERFIRE RIFLE CARTRIDGES (Packed 20 rounds per box, 10 boxes per case, 200 rounds per case)

CALIBER	INDEX IDI	RAMAC	PRIMER	WT.	BULLET STYLE	VELO	OCITY (FT./	SEC.)	EN	ERGY (FT./L	.BS.)		SH	ORT-RANG	E TRAJECTO	DRY		BALLISTIC
	NO.	NO.	NO.	(G.)		MUZZLE	100 YDS.	200 YDS.	MUZZLE	100 YDS.	200 YDS.	50 YDS.	100 YDS.	150 YDS.	200 YDS.	250 YDS.	300 YDS.	COEFFICIEN
223 Remington	L223R7	23748	7 1/2	45	Jacketed Hollow Point	3550	2953	2430	1259	871	590	-0.1	0.4	ZERO	-1.7	-4.8	-9.7	0.173
	L223R8	23812	7 1/2	50	Jacketed Hollow Point	3425	2899	2430	1302	933	655	-0.1	0.5	ZERO	-1.7	-4.9	-9.9	0.192
	L223R3	23711	7 1/2	55	FMJ	3240	2759	2326	1282	929	660	0.0	0.6	ZERO	-1.9	-5.5	-11.0	0.202
	L223R3L1	23894	7 1/2	55	FMJ	3240	2993	2759	1282	1094	930	-0.1	0.6	ZERO	-1.9	-5.5	-11.0	0.202
	L223R9	23815	7 1/2	62	Closed Tip Flat Base	3100	2734	2396	1323	1029	790	0.1	0.6	ZERO	-1.9	-5.4	-10.6	0.260
308 Win.	L308W4	23715	9 1/2	150	FMJ	2820	2533	2263	2648	2137	1705	-0.1	ZERO	-1.2	-3.9	-8.4	-14.7	0.314
6.8mm Remington SPC	L68R2	24035	9 1/2	115	FMJ	2625	2329	2053	1759	1385	1076	0.5	1.0	ZERO	-2.9	-7.8	-15.1	0.292
7.62 x 39mm	L762391	23709	7 1/2	123	FMJ	2365	2060	1780	1527	1159	865	0.1	ZERO	-2.2	-6.8	-14.1	-24.5	0.266

1 Linked in 100 Round Belt, 5 Belts Per Case, 500 Rounds Per Case.

DISINTEGRATOR® LEAD-FREE JACKETED, FRANGIBLE AMMUNITION (RIFLE) (Packed 20 rounds per box, 25 boxes per case, 500 rounds per case)

CALIBER	INDEX IDI	RAMAC	PRIMER	WT.	BULLET STYLE	VELO	OCITY (FT./S	SEC.)	ENE	RGY (FT./L	.BS.)	SHORT-RANG	E TRAJECTORY	BARREL
	NO.	NO.	NO.	(G.)		MUZZLE	100 YDS.	200 YDS.	MUZZLE	100 YDS.	200 YDS.	25 YDS.	50 YDS.	LENGTH
223 Remington	LF223R5B	23896	7 ½ HF	55	Lead-Free Jacketed, Powdered Metal Core, Frangible	3240	3031	2831	1282	1122	979	0.0	0.5	24

^{*}Test barrel length in inches

REMINGTON DUTY SLUG SHELLS

LOADS	INDEX IDI NO.	RAMAC NO.	GAUGE	SHELL LENGTH (IN.)	VELOCITY (FT/SEC)	NUMBER OF PELLETS	SLUG WEIGHT	ROUNDS PER BOX	BOXES PER CASE	ROUNDS PER CASE
Slugger Rifled Slug	SP12RS	20300	12	2 ¾	1560		1 oz. Rifled Slug	5	50	250
	SP12RSB(Blue Hull)	20279	12	2 ¾	1560	_	1 oz. Rifled Slug	5	50	250
	S12SRS	20302	12	2 ¾	1680	_	1 oz. Rifled Slug	5	50	250
	S12MRS	20270	12	3	1760		1 oz. Rifled Slug	5	50	250
Reduced Recoil Rifled Slug	RR12RSB(Blue Hull) ¹	20285	12	2 ¾	1200		1 oz. Rifled Slug	5	50	250

¹ May not function in all types of autoloading shotguns.

REMINGTON DUTY BUCKSHOT SHELLS

LOADS	INDEX IDI NO.	RAMAC NO.	GAUGE	SHELL LENGTH (IN.)	DRAM EQUIV.	VELOCITY (FT/SEC)	NUMBER OF PELLETS	SLUG WEIGHT	ROUNDS PER BOX	BOXES PER CASE	ROUNDS PER CASE
Reduced Recoil Buckshot	RR12BK00	20643	12	2 ¾	3	1200	9	00 Buck	25	10	250
	RR128B00	20645	12	3	2 ¾	1200	8	00 Buck	25	10	250
Buckshot	12B000	20406	12	2 ¾	3 ¾	1325	8	000 Buck	5	50	250
	12B00	20620	12	2 ¾	3 ¾	1325	9	00 Buck	5	50	250
	12B0	20622	12	2 ¾	3 ¾	1275	12	0 Buck	5	50	250
	12B1	20624	12	2 ¾	3 ¾	1250	16	1 Buck	5	50	250
	12B4	20626	12	2 ¾	3 ¾	1325	27	4 Buck	5	50	250
Law Enforcement Buckshot	SPL1200	20812	12	2 ¾	3 ¾	1325	9	00 Buck	25	10	250
Magnum Buckshot	12SB00	20632	12	2 ¾	4	1290	12	00 Buck	5	50	250
	12HB000	20408	12	3	4	1225	10	000 Buck	5	50	250
	12HB00	20636	12	3	4	1225	15	00 Buck	5	50	250
	12HB4	20640	12	3	4	1225	41	4 Buck	5	50	250
TAC 8 Buckshot	12BT800	20662	12	2 ¾	3 ¾	1325	8	00 Buck	5	50	250

REMINGTON TARGET SHOTSHELLS

LOADS	INDEX IDI NO.	RAMAC NO.	GAUGE	SHELL LENGTH (IN.)	DRAM EQUIV.	VELOCITY (FT/SEC)	OUNCES OF SHOT	SHOT SIZE	ROUNDS PER BOX	BOXES PER CASE	ROUNDS PER CASE
Target Loads	STS12L7	20110	12	2 ¾	2 ¾	1145	1 1/8	7 ½	25	10	250
	STS12L8	20112	12	2 ¾	2 ¾	1145	1 1/8	8	25	10	250
	STS12L85	20114	12	2 ¾	2 ¾	1145	1 1/8	8 1/2	25	10	250
	STS12L9	20116	12	2 ¾	2 ¾	1145	1 1/8	9	25	10	250
	STS12LH7	20250	12	2 ¾	3	1200	1 1/8	7 ½	25	10	250
	STS12LH8	20252	12	2 ¾	3	1200	1 1/8	8	25	10	250

REMINGTON RIMFIRE AMMUNITION (Packed 50 rounds per box, 100 boxes per case, 5000 rounds per case)

PRODUCT	INDEX IDI	RAMAC	WT.	BULLET STYLE	\	ELOCITY (FT/SEC	C)		ENERGY (FT./LBS	.)	MID-R	ANGE TRAJECTO	RY (IN.)
	NO.	NO.	(G.)		MUZZLE	50 YDS.	100 YDS.	MUZZLE	50 YDS.	100 YDS.	50 YDS.	100 YDS.	150 YDS.
Subsonic (Long Rifle)	SUB22HP	21140	38	Hollow Point	1050	965	901	93	79	69	0.3	0.0	-7.7
	SUB22HP ^{1,2}	21141	38	Hollow Point	1050	965	901	93	79	69	0.3	0.0	-7.7
Target, Standard Velocity (Long Rifle)	6122	21022	40	Round Nose	1150	1048	976	117	98	85	0.2	0.0	-6.4
	6100 ²	21284	40	Round Nose	1150	1048	976	117	98	85	0.2	0.0	-6.4
Thunderbolt, Hi-Speed (Long Rifle)	TB-22A	21238	40	Round Nose	1255	1113	1017	140	110	92	0.0	0.0	-5.6
Cyclone, Hi-Speed (Long Rifle)	CY-22HP	21222	36	Hollow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6
Golden Bullet, High Velocity (Long Rifle)	1522	21006	40	Plated, Lead Round Nose	1255	1113	1017	140	110	92	0.0	0.0	-5.6
	1500²	21276	40	Plated, Lead Round Nose	1255	1113	1017	140	110	92	0.0	0.0	-5.6
	1622	21008	36	Hollow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6
	1600²	21278	36	Hollow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6
	1622C3	21250	36	Hollow Point	1280	1117	1010	131	100	82	0.0	0.0	-5.6
Golden Bullet, High Velocity (Short)	1022	21000	29	Round Nose	1095	982	903	77	62	52	0.3	0.0	-7.4
Yellow Jacket Hyper Velocity (Long Rifle)	1722	21074	33	Truncated Cone, Hollow Point	1500	1247	1075	165	114	85	-0.2	0.0	-4.1
	1700²	21280	33	Truncated Cone, Hollow Point	1500	1247	1075	165	114	85	-0.2	0.0	-4.1
Viper (Long Rifle)	1922	21080	36	Truncated Cone, Solid	1410	1198	1056	159	115	89	-0.1	0.0	-4.7
	1900²	21288	36	Truncated Cone, Solid	1410	1198	1056	159	115	89	-0.1	0.0	-4.7

¹ Line of sight used is 1 1/4" above the axis of the bore. 2 These long rifle .22s available in slide-open plastic packs of 100 rounds per box, 50 boxes per case, 5,000 rounds per case. 3 Packed 525 rounds per box, 12 boxes per case, 6,300 rounds per case.

GOLDEN SABER BONDED HPJ (HIGH-PERFORMANCE JACKET) (Packed 50 rounds per box, 10 boxes per case, 500 rounds per case)

CALIBER	INDEX IDI	RAMAC	PRIMER	WT.	BULLET STYLE		VELOCITY (FT/SEC			ENERGY (FT./LBS.)		MID-RANGE TRA	AJECTORY (INCH)
	NO.	NO.	NO.	(G.)		MUZZLE	25 YDS.	50 YDS.	MUZZLE	25 YDS.	50 YDS.	25 YDS.	50 YDS.
357 SIG	GSB357SB	29408	5 ½	125	Brass-Jacketed Hollow Point, Bonded	1350	1245	1157	506	430	372	0.2	0.7
9mm Luger (+P) ¹	GSB9MMD	29351	1 ½	124	Brass-Jacketed Hollow Point, Bonded (+P)2	1180	1131	1089	384	352	327	0.2	0.8
	GSB9MMC	29353	1 ½	147	Brass-Jacketed Hollow Point, Bonded	990	965	941	320	304	289	0.3	1.1
40 S&W	GSB40SWA	29366	5 1/2	165	Brass-Jacketed Hollow Point, Bonded	1150	1089	1040	484	435	396	0.2	0.9
	GSB40SWB	29368	5 1/2	180	Brass-Jacketed Hollow Point, Bonded	1015	986	960	412	388	368	0.3	1.1
45 Auto	GSB45APA	29414	2 1/2	185	Brass-Jacketed Hollow Point, Bonded	1015	981	951	423	395	371	0.3	1.1
	GSB45APB	29378	2 1/2	230	Brass-Jacketed Hollow Point, Bonded	875	853	833	391	372	354	0.4	1.5

¹ Ammunition with "+P" or "+P+" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.

GOLDEN SABER HPJ (HIGH-PERFORMANCE JACKET) (Packed 50 rounds per box, 10 boxes per case, 500 rounds per case)

CALIBER	INDEX IDI	RAMAC	PRIMER	WT.	BULLET STYLE		VELOCITY (FT/SEC			ENERGY (FT./LBS.)	MID-RANGE TRA	JECTORY (INCH)
	NO.	NO.	NO.	(G.)		MUZZLE	25 YDS.	50 YDS.	MUZZLE	25 YDS.	50 YDS.	25 YDS.	50 YDS.
357 Mag. ¹	GS357MA	29400	5 ½	125	Brass-Jacketed Hollow Point	1220	1152	1095	413	368	333	0.2	0.8
9mm Luger	GS9MMB	29420	1 ½	124	Brass-Jacketed Hollow Point	1125	1074	1031	349	317	293	0.2	0.9
	GS9MMD	29424	1 ½	124	Brass-Jacketed Hollow Point (+P) ¹	1180	1131	1089	383	352	326	0.2	0.8
	GS9MMC	29422	1 ½	147	Brass-Jacketed Hollow Point	990	965	941	320	304	289	0.3	1.1
380 Auto	GS380B	29410	1 ½	102	Brass-Jacketed Hollow Point	940	920	901	200	192	184	0.3	1.4
38 Special ¹	GS38SB	29432	1 ½	125	Brass-Jacketed Hollow Point (+P) ²	975	950	929	264	250	238	0.3	1.3
40 S&W	GS40SWA	29440	5 1/2	165	Brass-Jacketed Hollow Point	1150	1089	1040	485	435	396	0.2	0.9
	GS40SWB	29442	5 1/2	180	Brass-Jacketed Hollow Point	1015	986	960	412	388	368	0.3	1.1
45 Auto	GS45AP	29444	2 1/2	185	Brass-Jacketed Hollow Point	1015	981	951	423	395	371	0.3	1.1
	GS45APB	29448	2 1/2	230	Brass-Jacketed Hollow Point	875	853	833	391	372	355	0.4	1.5
	GS45APC	29450	2 1/2	185	Brass-Jacketed Hollow Point (+P) ²	1140	1086	1041	534	484	445	0.2	0.9

¹ Note: These ballistics reflect vented barrel. 2 Ammunition with "+P" or "+P+" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.

UMC CENTERFIRE PISTOL & REVOLVER AMMUNITION (Packed 50 rounds per box, 10 boxes per case, 500 rounds per case)

CALIBER	INDEX IDI NO.	RAMAC NO.	PRIMER	WT.	BULLET STYLE		VELOCITY (FT/SEC)		ENERGY (FT./LBS.	MID-RANGE TRAJECTORY (IN.)		
			NO.	(G.)		MUZZLE	25 YDS.	50 YDS.	MUZZLE	25 YDS.	50 YDS.	25 YDS.	50 YDS.
25 Auto Pistol (6.35mm)	L25AP	23716	1 ½	50	Metal Case	760	733	707	64	60	56	0.5	2.0
32 Auto (7.65mm)	L32AP	23704	1 ½	71	Metal Case	905	879	854	129	122	115	0.4	1.7
357 Magnum¹	L357M12	23738	5 ½	125	Jacketed Soft Point	1450	1338	1240	583	497	427	0.1	0.6
9mm Luger	L9MM1	23752	1 ½	115	Jacketed Hollow Point	1155	1095	1046	341	306	280	0.2	0.9
	L9MM3	23728	1 ½	115	Metal Case	1135	1084	1041	329	300	277	0.2	0.9
	L9MM2	23718	1 ½	124	Metal Case	1100	1067	1030	339	314	292	0.2	1.0
	L9MM9	23732	1 ½	147	Metal Case	990	965	941	320	304	289	0.3	1.1
380 Auto	L380AP	23720	1 ½	95	Metal Case	955	904	860	192	172	156	0.3	1.3
38 Super Auto	L38SUP	23722	1 ½	130	Metal Case	1215	1152	1099	426	383	348	0.2	0.8
38 Special ¹ (+P) ²	L38S2	23754	1 ½	125	Semi-Jacketed Hollow Point (+P) ²	945	921	898	248	235	224	0.3	1.3
38 Special	L38S5	23724	1 ½	158	Lead Round Nose	755	739	723	200	191	183	0.5	2.1
	L38S11	23730	1 1/2	130	Metal Case	800	787	775	185	179	173	0.3	1.7
10mm Auto	L10MM6	23706	2 1/2	180	Metal Case	1150	1103	1063	528	486	451	0.2	0.9
357 SIG	L357S1	23734	5 ½	125	Metal Case	1350	1238	1146	506	425	365	0.2	0.7
	L357S2	23692	5 ½	125	Jacketed Hollow Point	1350	1245	1157	506	430	372	0.2	0.7
40 S&W	L40SW2	23694	5 ½	180	Jacketed Hollow Point	1015	986	960	412	388	368	0.3	1.1
The second second	L40SW3	23742	5 1/2	180	Metal Case	985	959	935	388	367	350	0.3	1.2
ENGLISH IN	L40SW4	23746	5 1/2	165	Metal Case	1150	1089	1040	484	435	396	0.2	0.9
44 Remington Magnum ¹	L44MG7	23744	2 1/2	180	Jacketed Soft Point	1610	1482	1366	1036	878	745	0.1	0.5
45 Auto	L45AP1	23818	2 ½	185	Metal Case	1015	981	951	423	395	371	0.3	1.1
DE RESIDEN	L45AP4	23726	2 1/2	230	Metal Case	835	817	800	356	341	326	0.4	1.6
Harry Town	L45AP7	23696	2 1/2	230	Jacketed Hollow Point	835	817	800	356	341	326	0.4	1.6
45 GAP	L45GAP4	23691	2 1/2	230	Metal Case	880	860	841	395	378	361	0.4	1.5

¹ Note: These ballistics reflect vented barrel. 2 Ammunition with "+P" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.

REMINGTON PISTOL AND REVOLVER DUTY AMMUNITION (Packed 50 rounds per box, 10 boxes per case, 500 rounds per case)

CALIBER	INDEX IDI	RAMAC NO.	PRIMER	WT.	BULLET STYLE	VELOCITY (FT/SEC)			ENERGY (FT./LBS.)			MID-RANGE TRAJECTORY (INCH)	
	NO.		NO.	(G.)		MUZZLE	25 YDS.	50 YDS.	MUZZLE	25 YDS.	50 YDS.	25 YDS.	50 YDS.
32 S&W	R32SW	22204	1 ½	88	Lead	680	645	610	90	81	73	0.6	2.5
32 S&W Long	R32SWL	22208	1 ½	98	Lead	705	670	635	115	98	88	0.6	2.3
32 (7.65mm) Auto	R32AP	22212	1 ½	71	Metal Case	905	855	810	129	115	97	0.4	1.4
357 Mag. ¹	R357M7	22228	5 ½	110	Semi-Jacketed Hollow Point	1295	1094	975	410	292	232	0.2	0.8
	R357M1	22216	5 ½	125	Semi-Jacketed Hollow Point	1450	1240	1090	583	427	330	0.1	0.6
	R357M2	22218	5 1/2	158	Semi-Jacketed Hollow Point	1235	1104	1015	535	428	361	0.2	0.8
	R357M3	22220	5 1/2	158	Soft Point	1235	1104	1015	535	428	361	0.2	0.8
	R357M5	22224	5 1/2	158	Semi-Wadcutter	1235	1104	1015	535	428	361	0.2	0.8
	RH357MA	29466	5 1/2	165	Jacketed Hollow Point Core-Lokt	1290	1237	1189	610	561	518	0.2	0.7
	R357M10	22234	5 ½	180	Semi-Jacketed Hollow Point	1145	1053	985	524	443	388	0.2	0.9
9mm Luger	R9MM1	28285	1 ½	115	Jacketed Hollow Point	1155	1047	971	341	280	241	0.9	3.9
	R9MM3	28290	1 ½	115	Metal Case	1135	1041	973	329	277	242	0.9	4.0
	R9MM6	28289	1 ½	115	Jacketed Hollow Point (+P) ²	1250	1113	1019	399	316	265	0.2	0.8
	RB9MM6	28324	1 ½	115	Jacketed Hollow Point, Bonded (+P) ²	1250	1175	1113	399	353	316	0.2	0.8
	R9MM2	22240	1 ½	124	Metal Case	1110	1030	971	339	292	259	0.2	0.9
	R9MM8	28299	1 ½	147	Jacketed Hollow Point (Subsonic)	990	941	900	320	289	264	0.3	1.1
380 Auto	R380A1	22246	1 ½	88	Jacketed Hollow Point	990	920	868	191	165	146	0.3	1.2
	R380AP	22252	1 ½	95	Metal Case	955	865	785	190	160	130	0.3	1.4
38 S&W	R38SW	22276	1 ½	146	Lead Round Nose	685	650	620	150	135	125	0.6	2.5
38 Special ¹	R38S10	22298	1 ½	110	Semi-Jacketed Hollow Point (+P) ²	995	926	871	242	210	185	0.3	1.2
	R38S16	22310	1 ½	110	Semi-Jacketed Hollow Point	950	890	840	220	194	172	0.3	1.3
	R38S2	22282	1 ½	125	Semi-Jacketed Hollow Point (+P) ²	945	898	858	248	224	204	0.3	1.3
	R38S3	22284	1 ½	148	Targetmaster Lead WC Match	710	634	566	166	132	105	0.6	2.4
	R38S5	22288	1 ½	158	Lead Round Nose	755	723	692	200	183	168	0.5	2.1
	R38S14	22304	1 ½	158	Semi-Wadcutter (+P) ²	890	855	823	278	257	238	0.3	1.4
	R38S6	22290	1 ½	158	Semi-Wadcutter	755	723	692	200	183	168	0.5	2.1
	R38S12	22300	1 ½	158	Lead Hollow Point (+P) ²	890	855	823	278	257	238	0.3	1.4
357 SIG	R357S1	22258	5 ½	125	Jacketed Hollow Point	1350	1245	1157	506	430	372	0.2	0.7
40 S&W	R40SW1	28347	5 1/2	155	Jacketed Hollow Point	1205	1095	1017	499	413	356	0.2	0.8
	R40SW2	28353	5 ½	180	Jacketed Hollow Point	1015	960	914	412	368	334	0.3	1.1
	R40SW5	28799	5 ½	155	Metal Case	1205	1134	1076	500	443	399	0.2	0.8
	R45C	28490	2 1/2	250	Lead Round Nose	860	820	780	410	375	340	0.4	1.6
45 Auto	R45AP2	21456	2 1/2	185	Jacketed Hollow Point	1000	939	889	411	362	324	0.3	1.1
	R45AP7	21469	2 1/2	230	Jacketed Hollow Point (Subsonic)	835	800	767	356	326	300	0.4	1.6
	R45AP4	21448	2 1/2	230	Metal Case	835	800	767	356	326	300	0.4	1.6

1 Note: These ballistics reflect vented barrel. 2 Ammunition with "+P" or "+P4" on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.

DISINTEGRATOR® CTF LEAD-FREE FRANGIBLE AMMUNITION (PISTOL & REVOLVER) (Packed 50 rounds per box, 10 boxes per case, 500 rounds per case)

CALIBER	INDEX IDI	RAMAC	PRIMER	WT.	BULLET STYLE	VELOCITY (FT./SEC.)			ENERGY (FT./LBS.)			SHORT-RANGE TRAJECTORY		BARREL
	NO.	NO.	NO.	(G.)		MUZZLE	100 YDS.	200 YDS.	MUZZLE	100 YDS.	200 YDS.	25 YDS.	50 YDS.	LENGTH
9mm Luger (+P) ‡	CTF9MMB	29460	1 ½ HMF	100	Lead-Free Jacketless, Copper/Tin Sintered, Frangible	1300	1213	1141	375	327	289	0.2	0.7	4
40 S&W	CTF40SWA	29463	5 1/2 HMF	125	Lead-Free Jacketless, Copper/Tin Sintered, Frangible	1300	1194	1110	469	396	342	0.2	0.8	4
45 Auto	CTF45APA	29464	2 1/2 HMF	155	Lead-Free Jacketless, Copper/Tin Sintered, Frangible	1150	1078	1022	455	400	360	0.2	0.9	5
9mm Luger (+P) ‡	FE9MM1	28358	1 ½ LF	101	Lead-Free Jacketed, Powdered Metal Core, Frangible	1250	1175	1112	350	310	277	0.2	0.8	4
40 S&W	FE40SW1	28360	5 ½ LF	141	Lead-Free Jacketed, Powdered Metal Core, Frangible	1135	1093	1056	403	374	349	0.2	0.9	4

^{*}Test barrel length in inches

‡Ammunition with (+P) on the case headstamp is loaded to higher pressure. Use only in firearms designated for this cartridge and so recommended by the gun manufacturer.

300, ADL, Accelerator, BDL, Bandit, Bore, BriteBore, Bronze Point, BuckHammer, Bullet, CBEE 22, CDL, Classic, Conquest, Copper-Lokt, Copper Solid, Core-Lokt, Custom Carry, Cyclone, D-Series, Deer Hunter, Disintegrator, DikLiebe, Driving Band, Duplex, Echo, Elite Hunter, ETA, EtronX, Excursion, Express, Express-Steel, EZ, F.A.S.T., Fast Action Soft Touch, Fieldmaster, Figure 8, Fireball, Flexitab, G3, Gamernaster, Genesis, Green Color, Golden, Golden Saber, Grizzly, Gun Club, Hi-Speed, Ideal, Kleanbore, Lead-Lokt, LV SF, M24, M24A2, MAX Gobbler, M24, M24A2, MAX Gobbler, M24, M24A2, MAX Gobbler, Maxing May Golder 132, Model 40-XB, Model 40-XB, Model 40-XB, Model 40-XB, Model 40-XB, Model 40-XB, Model 170, Model 750, Model 570, Model 570, Model 570, Model 570, Model 570, Model 570, Model 770, Mo

Weights, stock dimensions, checkering pattern and wood grain may vary according to the individual finearm. Remington reserves the right to change or modify its products without notice. Pricing may vary by model, specification, color, size and availability. Follow the safety rules printed in firearms instruction books and on ammunition boxes. If you do not have an instruction book for your Reminigton firearm, write to Reminigton Arms Company, Inc., Military, Law Enforcement, Technologies and Federal Agency Sales Divisions, 870 Reminigton Drive, PO Box 700. Madison, NC 27025, for a free copy or visit our websites at www.reminigton.com/manuals. Please specify the model and an entire the production of the price of the production of the price of the production of the price of the

Remington.